


QD300C SERIES SEAL CHARGER

This series chargers design of unsealed structure. It suitable for flooded lead acid batteries, sealed lead acid batteries, Lithium batteries, NI-MH batteries, Nickle Cadmium batteries, etc. They ate used to cycle charge or floating charge battery pack in Semi-electric stacker,E-Motor,AGV,Fork lifting platform, Electric Wheelchairs, electric power, ships, etc.

Models	Rated Voltage for Battery Pack	Output Voltage Range	Max Output current	CV			cut-off Current
				Lead Acid	Li-ion	LiFePO4	
				Li			
QD300C-12V15A	12V	12-17V	15A	14.7V	12.6V	14.6V	1.5A
QD300C-24V10A	24V	24-34V	10A	29.4V	29.4V	29.2V	1.0A
TECHNOLOGY PARAMETERS							
AC Input Voltage Range	100-264VAC; 45-65Hz						
AC Input Max Current	2.0A@220VAC						
Efficiency	≥89.0%						
Noise	≤45dB						
Product characteristics							
SAFFTY	Active Flyback technique is applied for a rapid respond on a fault; Quick active software self -protection and reliable passive hardware self-protection on VOLTAGE&CURRENT; Advanced charging strategy is integrated as a safeguard for battery system.						
RELIABILITY	The shell is shaped by extrude Aluminum technique. The active cooling fan is also designed to be a fan with a potting structure and a longer life. Products of Charger Series have been operating in all kinds of industrial environment (Wet. Hot. Cold. High altitude) for more than ten years,the design is proved to pass the verification.						
SIZE AND WEIGHT&TEMPERATURE							
Net Weight	1.1kg	Operating Temperature	-20℃—65℃				
Storage Temperature	-40℃—95℃	Size/mm	159*102.8*67.9				

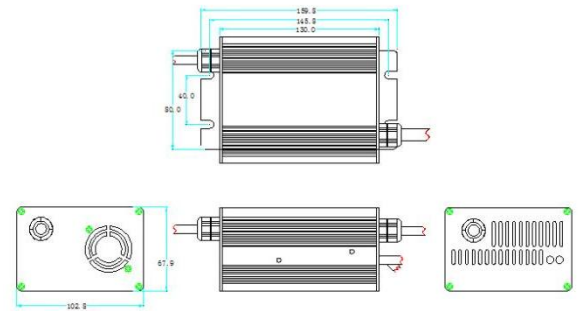

ROTECTION FUNCTIONS

Burnout Protection	Temperature of charger exceeds the limitation. The charge will low down the power load. Temperature of environment exceeds 65℃, the charger will stop charging and switch itself to standby mode until temperature of environment goes down.
Protection for Reverse Connection of Batteries	The circuit inside the charger shuts down with batteries when the batteries are connected reversely and will not damage the charger.
NO-load Protection	There is no output when the batteries are not connected.
Short Circuit Protection	The circuit inside the charger shuts down with batteries when output is short circuit. The charger will start charging only after troubleshooting and restart the charger.
Automatic shutdown when fully charging	The charging automatically turns off after the battery is fully charged according to the charger' s judgment.